



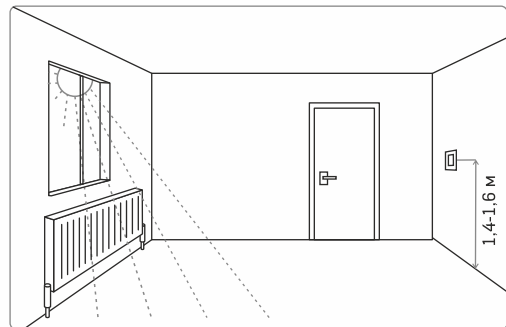

1	2.5
1	0.5
1	3
	2 × 1,0
	3
0...35 °	(.1).
1 °	2/3
-1	3 000
-1	16
230 ±10%	
0,18 ±10%	
(× ×)	75 × 75 × 39
NTC	
10	25 ° (R10)
50 000	
20 000 000	
14254	IP20

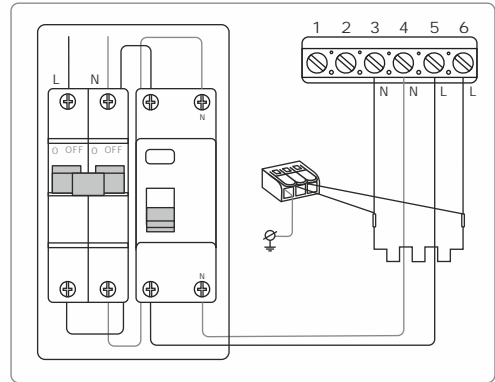

⚠

(230 ±10%, 50)
3 (, N) 2 (, L).
1 4
()

⚠

«-» (. .1).
«+» «-». 3

30%.

(25 °)
«+» «-»,
«+» «-»

OFF («+» 4
3) «OFF».

on 4 «+»
«on».

()
Loc «+» «-» 6
(«OFF»). «Loc»

⚠

1

(.1).

(50).

Welrok vt

0 35 °

1 °

16

60



+40°),

(-5°

(.1).



Welrok
elegram-
support@welrok.com



85° ,

« ».

230 ().

() ()

« ».

80° ,

5

5° ,

12

80°

«-»

1



(±5,0° , 0,1°)

6



(1,2 , 0,1 - 3,0 , 0,1)

9



11



30

60

Welrok

« ».

14

309182,

info@welrok.com



welrok.com

004/2011 «

», 020/2011 «

26.51.70-001-46878736-2022

vu11 230109

